

DCFA_S-1W Series



CE Report RoHS

Features

- Wide operating temperature range : -40°C to +105°C
- Up to 85% efficiency
- No load current as low as 5mA
- Ripple as low as 30mVp-p
- Sustainable short-circuit protection

Description

Fixed voltage input, Output 1W, Isolated, Unregulated, Single output, SIP package.

Model Numbering

DCFAXxxxS-1W



Selection Guide

Product Model	Input Voltage Standard Value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μF)
DCFA0303S-1W	3.3VDC (2.97-3.63)	±3.3	±152/±15	70/74	1200
DCFA0305S-1W		±5	±100/±10	78/82	1200
DCFA0309S-1W		±9	±56/±6	78/83	470
DCFA0312S-1W		±12	±42/±5	78/83	220
DCFA0315S-1W		±15	±34/±4	78/83	220
DCFA0324S-1W		±24	±21/±3	80/85	100
DCFA0503S-1W	5VDC (4.5-5.5)	±3.3	±152/±15	70/74	1200
DCFA0505S-1W		±5	±100/±10	78/82	1200
DCFA0509S-1W		±9	±56/±6	78/83	470
DCFA0512S-1W		±12	±42/±5	78/83	220
DCFA0515S-1W		±15	±34/±4	78/83	220
DCFA0524S-1W		±24	±21/±3	80/85	100

DC-DC CONVERTERS

1 WATT

Product Model	Input Voltage Standard Value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μ F)
DCFA0903S-1W	9VDC (8.1-9.9)	± 3.3	$\pm 152/\pm 15$	70/74	1200
DCFA0905S-1W		± 5	$\pm 100/\pm 10$	78/82	1200
DCFA0909S-1W		± 9	$\pm 56/\pm 6$	78/83	470
DCFA0912S-1W		± 12	$\pm 42/\pm 5$	78/83	220
DCFA0915S-1W		± 15	$\pm 34/\pm 4$	78/83	220
DCFA0924S-1W		± 24	$\pm 21/\pm 3$	80/85	100
DCFA1203S-1W	12VDC (10.8-13.2)	± 3.3	$\pm 152/\pm 15$	70/74	1200
DCFA1205S-1W		± 5	$\pm 100/\pm 10$	78/82	1200
DCFA1209S-1W		± 9	$\pm 56/\pm 6$	78/83	470
DCFA1212S-1W		± 12	$\pm 42/\pm 5$	78/83	220
DCFA1215S-1W		± 15	$\pm 34/\pm 4$	78/83	220
DCFA1224S-1W		± 24	$\pm 21/\pm 3$	80/85	100
DCFA1503S-1W	15VDC (13.5-16.5)	± 3.3	$\pm 152/\pm 15$	70/74	1200
DCFA1505S-1W		± 5	$\pm 100/\pm 10$	78/82	1200
DCFA1509S-1W		± 9	$\pm 56/\pm 6$	78/83	470
DCFA1512S-1W		± 12	$\pm 42/\pm 5$	78/83	220
DCFA1515S-1W		± 15	$\pm 34/\pm 4$	78/83	220
DCFA1524S-1W		± 24	$\pm 21/\pm 3$	80/85	100
DCFA2403S-1W	24VDC (21.6-26.4)	± 3.3	$\pm 152/\pm 15$	70/74	1200
DCFA2405S-1W		± 5	$\pm 100/\pm 10$	78/82	1200
DCFA2409S-1W		± 9	$\pm 56/\pm 6$	78/83	470
DCFA2412S-1W		± 12	$\pm 42/\pm 5$	78/83	220
DCFA2415S-1W		± 15	$\pm 34/\pm 4$	78/83	220
DCFA2424S-1W		± 24	$\pm 21/\pm 3$	80/85	100

Input Characteristics

Parameter	Conditions		Min.	Typ.	Max.	Units
Input current (Rated Load)	Nominal voltage input@3.3VDC	3.3VDC Output	--	384	405	mA
		5VDC Output	--	370	389	mA
		9VDC/12VDC Output	--	365	389	mA
		15VDC/24VDC Output	--	350	389	mA
	Nominal voltage input@5VDC	3.3VDC Output	--	271	286	mA
		5VDC Output	--	244	257	mA
		9VDC/12VDC Output	--	241	254	mA
		15VDC/24VDC Output	--	241	254	mA
	Nominal voltage input@12VDC	3.3VDC Output	--	112	118	mA
		5VDC Output	--	105	110	mA
		9VDC/12VDC Output	--	104	110	mA
		15VDC/24VDC Output	--	103	110	mA
	Nominal voltage input@15VDC	3.3VDC Output	--	84	89	mA
		5VDC Output	--	84	89	mA
		9VDC/12VDC Output	--	83	89	mA
		15VDC/24VDC Output	--	83	88	mA
	Nominal voltage input@24VDC	3.3VDC Output	--	56	61	mA
		5VDC Output	--	53	58	mA
		9VDC/12VDC Output	--	53	58	mA
		15VDC/24VDC Output	--	52	58	mA
Input current (No load)			--	5	20	mA
Reflected ripple current			3	15	20	mA
Input impulse voltage	1sec. max.	3.3VDC/5VDC Input	-0.7	--	9	VDC
		9VDC Input	-0.7	--	12	VDC
		12VDC Input	-0.7	--	18	VDC
		15VDC Input	-0.7	--	21	VDC
		24VDC Input	-0.7	--	30	VDC
Input filter	Capacitive filtering					

Remarks: This product does not support hot plug

Output Characteristic

Parameter	Conditions		Min.	Typ.	Max.	Units
Output voltage accuracy			SeeFigure3 (envelope curve)			
Linear regulation rate	Input voltage variation+/-1%	3.3VDC Output	--	--	+/-1.5	%
		Other outputs	--	--	+/-1.2	%
Load regulation rate	10% to 100% load	3.3VDC Output	--	15	20	%
		5VDC Output	--	10	15	%
		9VDC Output	--	8	10	%
		12VDC Output	--	7	10	%
		15VDC Output	--	6	10	%
		24VDC Output	--	5	10	%
Ripple &Noise	20MHz bandwidth		--	30	100	mVp-p
Temperature drift coefficient	100%load		--	+/-0.03	--	%/°C
Short circuit protection	Sustainable, Self-healing					

Note: The testing method for ripple and noise is the parallel line testing method.

General Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Input-output, Test time1 minute, Leakage current less than1 mA	1500	--	--	VDC
Insulation resistance	Input-output, Insulation voltage 500VDC	1000	--	--	MΩ
Isolation capacitance	Input-output, 100KHz/0.1V	--	20	50	pF
Working temperature	Temperature≥ 85°Cfor derating (See Figure4)	-40	--	+105	°C
Storage temperature		-55	--	+125	°C
Storage humidity	Non condensing	--	--	95	%RH

DC-DC CONVERTERS

1 WATT

Parameter	Conditions	Min.	Typ.	Max.	Units
Housing temperature rise during operation	Ta=25°C, Nominal Input, Full Output	--	15	25	°C
Soldering temperature resistance of pins	The distance from the welding spot to the shell is 1.5mm, 10 seconds	--	--	300	°C
	REFLOW: Peak temperature Tc≤245°C, maximum time above 217°C for 60 seconds.	--	--	245	°C
Switching frequency	Full load, Nominal input voltage	--	270	--	kHz
Mean time between failures 【MTBF】	MIL-HDBK-217F@25°C	3500	--	--	kHours

Physical Characteristics

Parameter	Contents
Housing material	Black flame retardant and heat-resistant plastic (UL94V-0)
Overall dimensions	19.65 × 6.00 × 10.16mm
Weight	2.1g(Typ.)
Cooling mode	Natural air cooling

EMC Characteristics

Parameter	Category	Content
EMI	Conductive disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
	Radiation disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
EMS	Electrostatic discharge	IEC/EN61000-4-2 Contact ±4KV perf. Criteria B

Circuit Design and Application

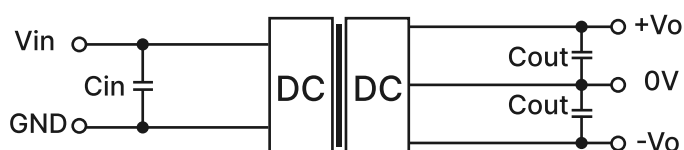


Figure 1: Application circuit

Table 1:
Recommended Capacitive Load Values

Vin(VDC)	Cin(μF)	Vo(VDC)	Cout(μF)
Nominal voltage	1-10	Nominal voltage	2.2-22

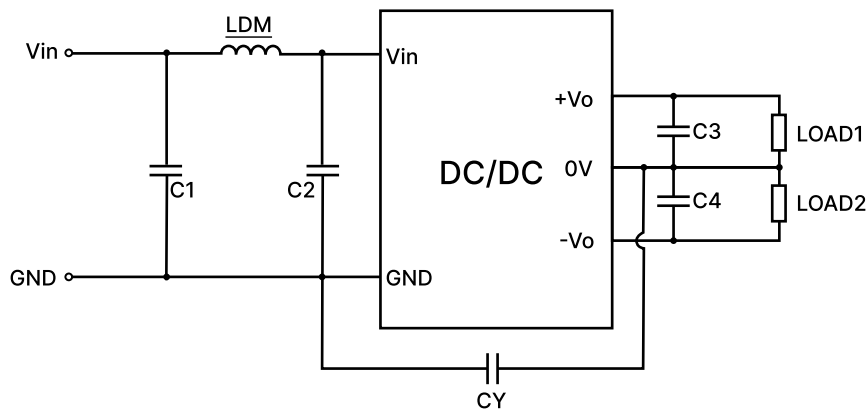


Figure 2: EMC Typical Recommended Circuits

Table 2:
Recommended Circuit Parameter Values

Category	Component	Value
EMI	C1	4.7μF /50V
	C2	4.7μF /50V
	C3,C4	2.2-22μF /50V
	CY	270pF/2kV
	LDM	6.8μH

1. Typical application: If further reduction of input and output ripple is required, a capacitor filter network can be connected at the input and output ends. The application circuit is shown in Figure 1. However, suitable filter capacitors should be selected. If the capacitance is too large, it may cause overcurrent or poor startup of the power supply. For each output, while ensuring safe and reliable operation, the recommended capacitance load values are shown in Table 1.
2. EMC requirements: For situations with high EMC requirements, a typical EMC recommended circuit is shown in Figure 2.
3. Input requirements: Ensure that the fluctuation range of the input voltage does not exceed the upper and lower limits of the input voltage specified in this data sheet, and the input power must be greater than the output power specified in this data sheet. For situations with a 24V input voltage, it is recommended to connect a TVS tube between the positive and negative input pins for protection (recommended parameters for TVS tubes: 30V, bidirectional, SOD-123 packaging).
4. Output load requirements: Try to avoid using it without load as much as possible; When the actual power of the load is less than 10% of the rated output power in this data sheet, or when it needs to be used in no-load situations, it is recommended to connect a load resistor externally at the output end. The load resistor can be calculated according to 5-10% of the rated power in this data sheet. The calculation formula for the load resistor value is $R_L = V_{out}^2 / (P_{out} * 10\%)$.
5. Overload protection: Under normal working conditions, the output circuit of this product has no protection function for overload situations. The simplest method is to connect a self recovery fuse in series at the input end, or add a circuit breaker outside the circuit; Or during design and selection, the actual power of the circuit should be around 60-80% of the rated power in this data sheet.

Product Characteristic Curve

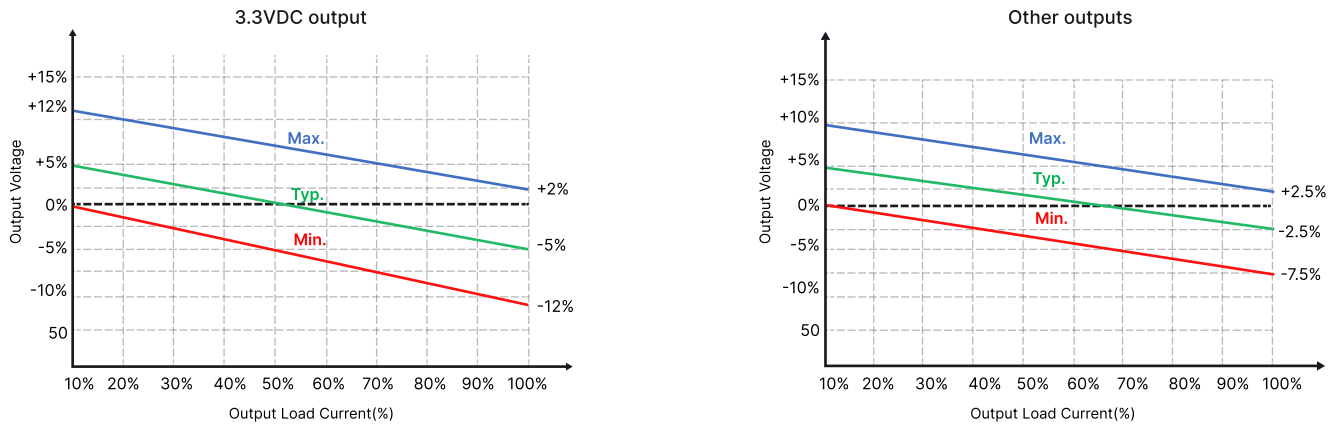


Figure 3: Voltage tolerance envelope

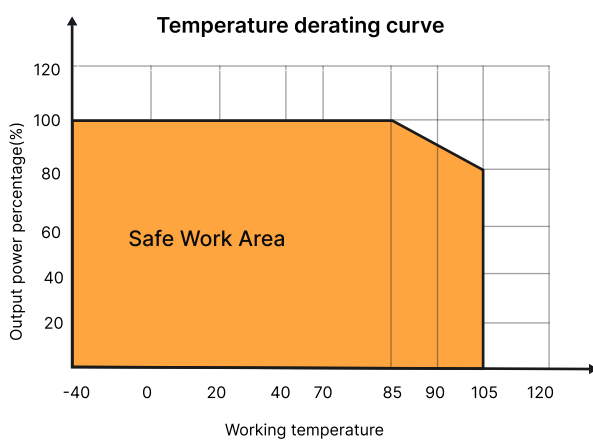


Figure 4: Temperature Derating Curve

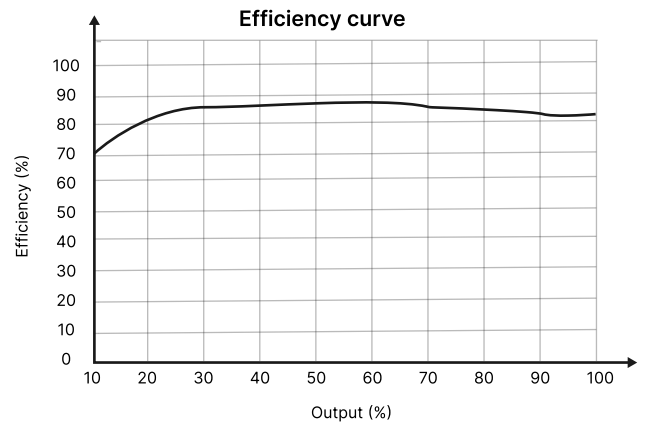


Figure 5: Efficiency Vs Output Load (Nominal Voltage Input)


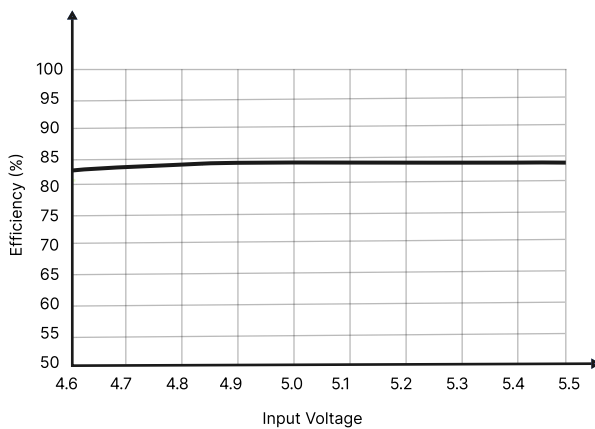


Figure 6: Efficiency Vs Input Voltage (100% Load)

Overall Dimensions and Pin Functions

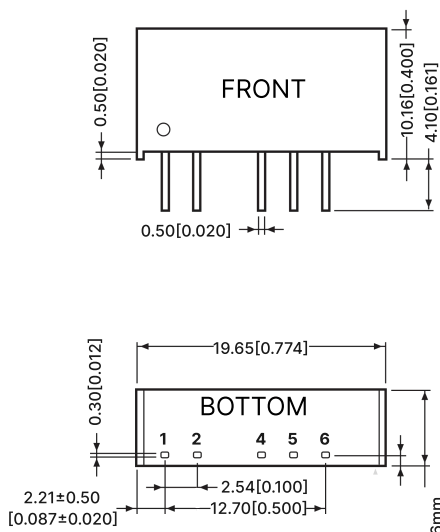

Note: The grid distance is 2.54mm * 2.54mm





Table 3: Pin Function Table

Pin	Function
1	Vin
2	GND
4	-Vo
5	0V
6	+Vo


Note:
 Dimensions in mm
 Terminal diameter tolerance: ± 0.10
 Undeclared tolerance: ± 0.50

Figure 7: Overall dimensions


Packaging Method



18 Pieces/Tube



900 Pieces/Inner box



4500 Pieces/Outer box

Notes & Instructions

- 1.The input voltage shall not exceed the specified range value, otherwise permanent and unrecoverable damage maybe caused;
2. Unless otherwise specified,the parameters in this manual are measured at 25 °C,40%~75% humidity, input nominal voltage and output pure resistance mode under full load;
- 3.All index test methods are based on the company's enterprise standards.
- 4.The copyright and the final interpretation right of the product belong to HENXV.