

DCMA_S-3W Series




Features

- Wide voltage range input (2:1)
- Wide operating temperature range : -40°C To +85°C
- Up to 85% efficiency
- Standby power consumption: 0.3W
- Output short circuit, overcurrent, overload protection

Description

DC-DC Module Power Supply, Wide Voltage Input, Power 3W, Isolated, Regulated, Positive And Negative Dual Output, SIP Packaging.

Model Numbering

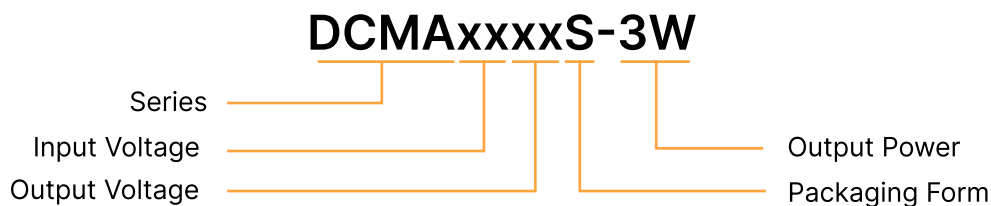

Selection Guide

Product Model	Input Voltage Standard Value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μF)
DCMA0505S-3W	5VDC (4.5-9)	±5VDC	±300/0	80/83	2200
DCMA0512S-3W		±12VDC	±125/0	83/85	1000
DCMA0515S-3W		±15VDC	±100/0	83/86	680
DCMA0524S-3W		±24VDC	±62.5/0	83/86	470

DC-DC CONVERTERS
3 WATTS

Product model	Input Voltage Standard Value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μ F)
DCMA1203S-3W	12VDC (9-18)	$\pm$ 3.3VDC	$\pm$ 450/0	73/77	1800
DCMA1205S-3W		$\pm$ 5VDC	$\pm$ 300/0	80/83	1000
DCMA1209S-3W		$\pm$ 9VDC	$\pm$ 167/0	82/84	680
DCMA1212S-3W		$\pm$ 12VDC	$\pm$ 125/0	83/85	470
DCMA1215S-3W		$\pm$ 15VDC	$\pm$ 100/0	83/86	220
DCMA1224S-3W		$\pm$ 24VDC	$\pm$ 62.5/0	83/86	100
DCMA2403P-3W	24VDC (18-36)	$\pm$ 3.3VDC	$\pm$ 450/0	73/77	1800
DCMA2405S-3W		$\pm$ 5VDC	$\pm$ 300/0	80/83	1000
DCMA2409S-3W		$\pm$ 9VDC	$\pm$ 167/0	82/84	680
DCMA2412S-3W		$\pm$ 12VDC	$\pm$ 125/0	83/85	470
DCMA2415S-3W		$\pm$ 15VDC	$\pm$ 100/0	83/86	220
DCMA2424S-3W		$\pm$ 24VDC	$\pm$ 62.5/0	83/86	100
DCMA4803S-3W	48VDC (36-75)	$\pm$ 3.3VDC	$\pm$ 450/0	73/77	1800
DCMA4805S-3W		$\pm$ 5VDC	$\pm$ 300/0	80/83	1000
DCMA4809S-3W		$\pm$ 9VDC	$\pm$ 167/0	82/84	680
DCMA4812S-3W		$\pm$ 12VDC	$\pm$ 125/0	83/85	470
DCMA4815S-3W		$\pm$ 15VDC	$\pm$ 100/0	83/86	220
DCMA4824S-3W		$\pm$ 24VDC	$\pm$ 62.5/0	83/86	100

Input Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Units
Input current (Rated Load)	Nominal voltage input@5VDC	--	700	800	mA
	Nominal voltage input@12VDC	--	250	320	mA
	Nominal voltage input@24VDC	--	130	160	mA
	Nominal voltage input@48VDC	--	65	80	mA
Input current (No-load)	Nominal voltage input@5VDC	--	10	30	mA
	Nominal voltage input@12VDC	--	07	30	mA
	Nominal voltage input@24VDC	--	07	25	mA
	Nominal voltage input@48VDC	--	06	25	mA
Reflected ripple current		30	40	50	mA
Input impulse voltage	1sec. max.	0.7	--	16	VDC
		0.7	--	25	VDC
		0.7		50	VDC
		0.7	--	100	VDC
		--	--	4.5	VDC
Starting voltage		--	--	09	VDC
		--	--	18	VDC
		--	--	36	VDC
Under voltage protect	Nominal voltage input	03	3.5	--	VDC
		5.5	6.5	--	VDC
		12	15.5	--	VDC
		26	30	--	VDC
Start Time		--	10	--	ms
Remote control foot (Some models are applicable)	Module On	Ctrl hovering or connected to TTL high level (3.5-12VDC)			
	Module shutdown	Ctrl connected to GND or low level (0-1.2VDC)			
	Input current during shutdown	--	06	10	mA
Input filter	PI type				

Remarks: This product does not support hot plug

Output Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units
Output voltage accuracy	0% -100% Load	--	±1	±3	%
Linear regulation rate	Input voltage variation+/- 1%	--	--	±1.5	%
Load regulation rate	Input voltage variation+/- 1%	--	±0.5	±1.5	%
Ripple & Noise	20MHz bandwidth	--	30	100	mVp-p
Dynamic response step deviation		--	±3	±5	%
Dynamic response recovery time		300	500	300	μ s
Temperature drift coeicient	100% load	--	±0.03	--	%/°C
Output overvoltage protection	Full voltage range input	110	--	160	%Vo
Output overcurrent protection	Full voltage range input	110	140	190	%
Short circuit protection	Sustainable, Self-healing				

Note: The testing method for ripple and noise is the parallel line testing method.

General Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Input-output, Test time 1 minute, Leakage current less than1 mA	1500	--	--	VDC
Insulation resistance	Input-output, Insulation voltage 500VDC	1000	--	--	MΩ
Isolation capacitance	Input-output, 100KHz/0.1V	--	120	1000	pF
Working temperature	Temperature ≥ 71 °Cfor derating (See Figure4)	-40	--	+85	°C
Storage temperature		-55	--	+125	°C
Storage humidity	Non condensing	--	--	95	%RH

DC-DC CONVERTERS

3 WATTS

Parameter	Conditions	Min.	Typ.	Max.	Units
Housing temperature rise during operation	Ta=25°C,Nominal Input, Full Output	--	15	25	°C
Soldering temperature resistance of pins	The distance from the welding spot to the shell is 1.5mm, 10 seconds	--	--	300	°C
	REFLOW: Peak temperature Tc≤245°C, maximum time above 217°C for 60 seconds.	--	--	245	°C
Switching frequency	Full load, Nominal input voltage	--	270	--	kHz
Mean time between failiures 【MTBF】	MIL-HDBK-217F@25°C	2000	--	--	kHours

Physical Characteristics

Parameter	Contents
Housing material	Black flame retardant and heat-resistant plastic (UL94V-0)
Overall dimensions	23.20 × 9.90 × 12.90 mm
Weight	4.7g(Typ.)
Cooling mode	Natural air cooling

EMC Characteristics

Parameter	Category	Content
EMI	Conductive disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
	Radiation disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
EMS	Electrostatic discharge	IEC/EN61000-4-2 Contact ±4KV perf. Criteria B

Circuit Design and Application

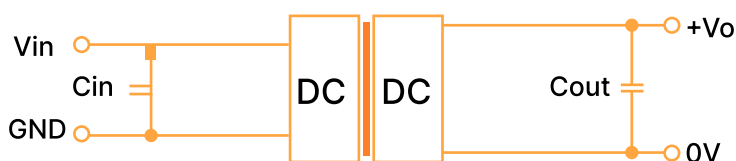


Figure 1: Application circuit

Table 1:
Recommended Capacitive Load Values

Vin(VDC)	Cin(μF)	Vo(VDC)	Cout(μF)
Nominal voltage	100	Nominal voltage	10

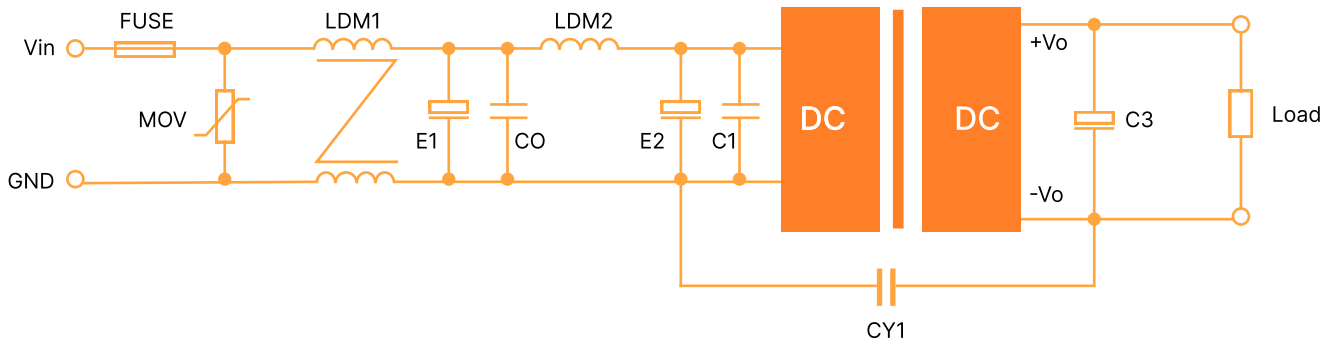


Figure 2: EMC Typical Recommended Circuits

Table 2:
Recommended Circuit Parameter Values

Category	Component	Value
EMI	MOV	14D560K
	E1/E2	100μF
	C0/C1	1μF
	CY1	1nF/2KV
	LDM1	10mH
	LDM2	10μH

1. Typical application: If further reduction of input and output ripple is required, a capacitor filter network can be connected at the input and output ends. The application circuit is shown in Figure 1. However, suitable filter capacitors should be selected. If the capacitance is too large, it may cause overcurrent or poor startup of the power supply. For each output, while ensuring safe and reliable operation, the recommended capacitance load values are shown in Table 1.

2. EMC requirements: For situations with high EMC requirements, a typical EMC recommended circuit is shown in Figure 2.

3. Input requirements: Ensure that the fluctuation range of the input voltage does not exceed the upper and lower limits of the input voltage specified in this data sheet, and the input power must be greater than the output power specified in this data sheet. For situations with a 24V input voltage, it is recommended to connect a TVS tube between the positive and negative input pins for protection (recommended parameters for TVS tubes: 30V, bidirectional, SOD-123 packaging).

4. Output load requirements: Try to avoid using it without load as much as possible; When the actual power of the load is less than 10% of the rated output power in this data sheet, or when it needs to be used in no-load situations, it is recommended to connect a load resistor externally at the output end. The load resistor can be calculated according to 5-10% of the rated power in this data sheet. The calculation formula for the load resistor value is $R_L = V_{out}^2 / (P_{out} * 10\%)$.

5. Overload protection: Under normal working conditions, the output circuit of this product has no protection function for overload situations. The simplest method is to connect a self recovery fuse in series at the input end, or add a circuit breaker outside the circuit; Or during design and selection, the actual power of the circuit should be around 60-80% of the rated power in this data sheet.

Product Characteristic Curve

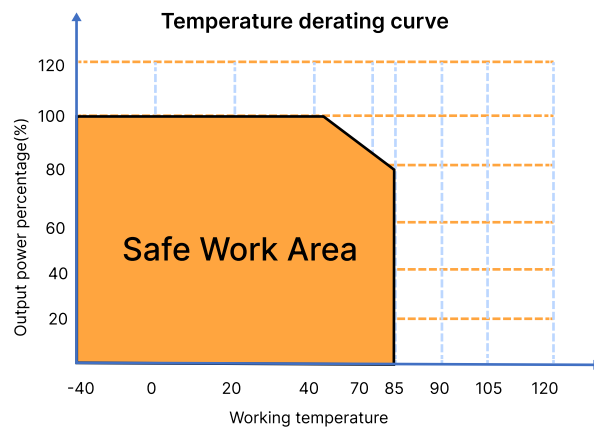


Figure 4: Temperature Derating Curve

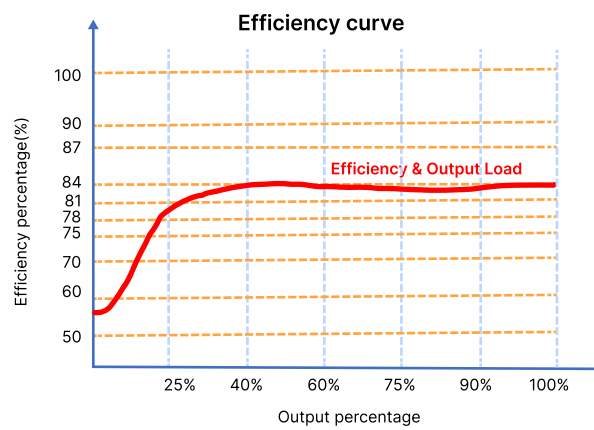


Figure 5: Efficiency Vs Output Load
(Nominal Voltage Input)

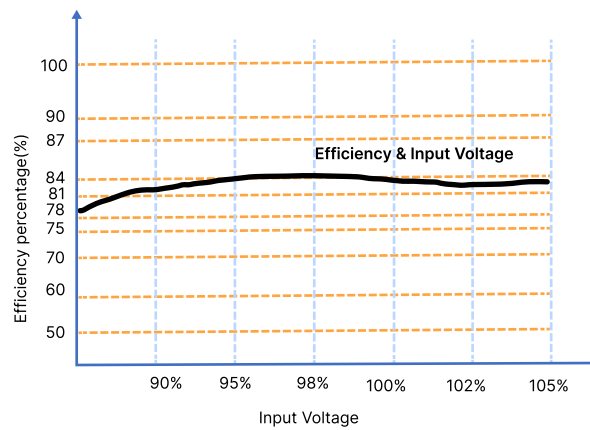


Figure 6: Efficiency Vs Input Voltage
(100% Load)

Overall Dimensions and Pin Functions


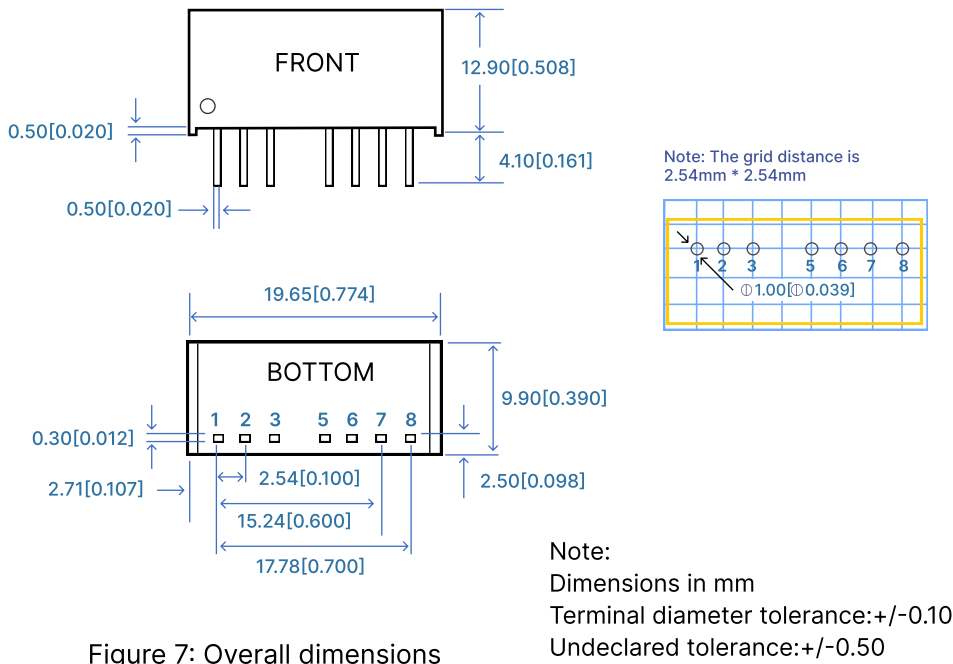


Table 3: Pin Function Table

Pin	Function
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	0V
8	-Vo

*NC cannot be connected to any external circuits

Packaging Method

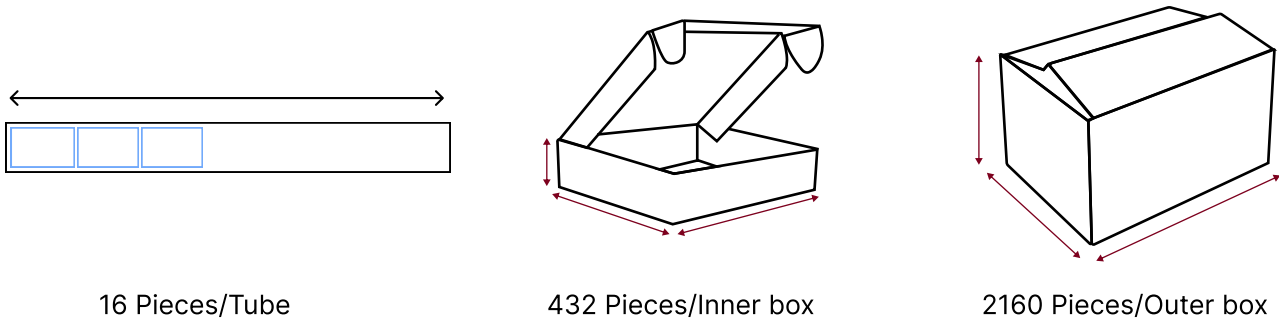

Notes & Instructions

- 1.The input voltage shall not exceed the specified range value, otherwise permanent and unrecoverable damage maybe caused;
2. Unless otherwise specified,the parameters in this manual are measured at 25 °C,40%~75% humidity, input nominal voltage and output pure resistance mode under full load;
- 3.All index test methods are based on the company's enterprise standards.
- 4.The copyright and the final interpretation right of the product belong to HENXY.